




Rec'd 10/538278
PTO 10 JUN 2005
PCT/IB 03/05537

27. 11. 03



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

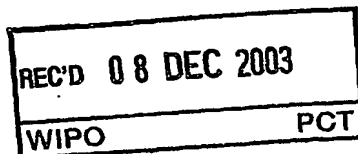


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

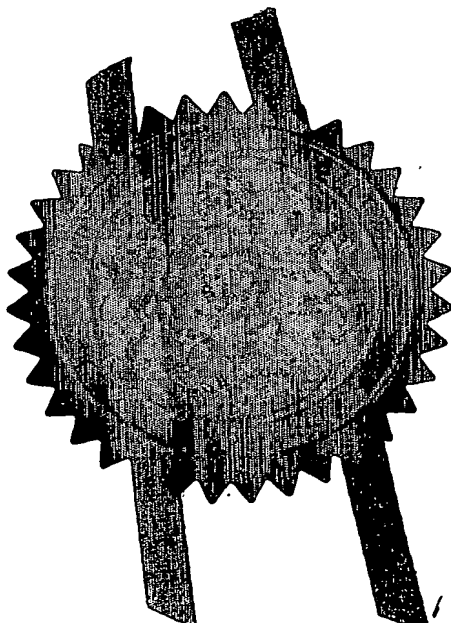

Signed


Dated 5 September 2003

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

The
**Patent
Office**

1/77



Request for grant of a patent
(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

1.	Your reference	PHGB 020219	16DEC02 E771207-4 003008
2.	Patent application number (The Patent Office will fill in this part)	0229236.5	001/7700 0.00-0229236.5
3.	Full name, address and postcode of the or of each applicant (<u>underline all surnames</u>)	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS 07419294001 ✓	
	Patents ADP Number (if you know it)		
	If the applicant is a corporate body, give the country/state of its incorporation	THE NETHERLANDS	
4.	Title of the invention	AMLCD WITH INTEGRATED TOUCH INPUT	
5.	Name of your agent (if you have one)		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Philips Intellectual Property & Standards Cross Oak Lane Redhill Surrey RH1 5HA	
	Patents ADP number (if you know it)	08359655001 ✓	
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority Application number Date of filing
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:	YES	
	a) any applicant named in part 3 is not an inventor, or		
	b) there is an inventor who is not named as an applicant, or		
	c) any named applicant is a corporate body.		
	See note (d))		

- Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	11
Claims(s)	4
Abstract	1
Drawings	3

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and

search (*Patents Form 9/77*)

Request for substantive examination


(*Patents Form 10/77*)

Any other documents

(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

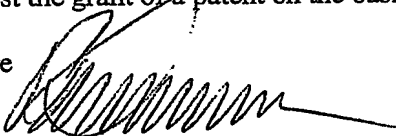

Date

11/12/02

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5280

P L WILLIAMSON

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered "Yes" Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*

DESCRIPTION

AMLCD WITH INTEGRATED TOUCH INPUT

5 This invention relates to active matrix liquid crystal displays, and particularly such displays with a touch sensitive input function.

Active matrix displays typically comprise an array of pixels arranged in rows and columns. Each row of pixels shares a row conductor which connects
10 to the gates of the thin film transistors of the pixels in the row. Each column of pixels shares a column conductor, to which pixel drive signals are provided. The signal on the row conductor determines whether the transistor is turned on or off, and when the transistor is turned on, by a high voltage pulse on the row conductor, a signal from the column conductor is allowed to pass on to an area
15 of liquid crystal material (or other capacitive display cell), thereby altering the light transmission characteristics of the material.

Figure 1 shows a conventional pixel configuration for an active matrix liquid crystal display. The display is arranged as an array of pixels in rows and columns. Each row of pixels shares a common row conductor 10, and each
20 column of pixels shares a common column conductor 12. Each pixel comprises a thin film transistor 14 and a liquid crystal cell 16 arranged in series between the column conductor 12 and a common electrode 18. The transistor 14 is switched on and off by a signal provided on the row conductor 10. The row conductor 10 is thus connected to the gate 14a of each transistor 14 of the associated row of pixels. Each pixel additionally may comprise a storage
25 capacitor 20 which is connected at one end 22 to the next row electrode, to the preceding row electrode, or to a separate capacitor electrode. The capacitance of the pixel (capacitor 20 or self-capacitance) stores a drive voltage so that a signal is maintained across the liquid crystal cell 16 even
30 after the transistor 14 has been turned off.

In order to drive the liquid crystal cell 16 to a desired voltage to obtain a required gray level, an appropriate signal is provided on the column conductor

12 in synchronism with a row address pulse on the row conductor 10. This row address pulse turns on the thin film transistor 14, thereby allowing the column conductor 12 to charge the liquid crystal cell 16 to the desired voltage, and also to charge the storage capacitor 20 to the same voltage. At the end of the row address pulse, the transistor 14 is turned off, and the storage capacitor 20 maintains a voltage across the cell 16 when other rows are being addressed. The storage capacitor 20 reduces the effect of liquid crystal leakage and reduces the percentage variation in the pixel capacitance caused by the voltage dependency of the liquid crystal cell capacitance.

10 The rows are addressed sequentially so that all rows are addressed in one frame period, and refreshed in subsequent frame periods.

As shown in Figure 2, the row address signals are provided by row driver circuitry 30, and the pixel drive signals are provided by column address circuitry 32, to the array 34 of display pixels.

15 The ability to interact with a display by using fingers (touch input) or a stylus (pen input) to allow input to the system connected to the display is a highly desirable feature and a number of methods have been developed to do this. In most cases, these methods involve the addition of extra components in front of, behind or around the edge of the display.

20 It has been recognised that the liquid crystal layer of a display can also be used as a pressure sensor. In particular, the application of pressure to the liquid crystal layer changes the local electrical capacitance of the layer, and this change can be used to detect the presence of a pressure input at that point. Some schemes have been proposed with simultaneous display and pressure sensing, and others have been proposed with sequential display and pressure sensing operations.

For example, JP 2000/066837 discloses a method by which the amount of charge required to recharge a pixel is measured and compared with the charge required for other pixels. In this way, a change in capacitance is detected, representative of pressure applied to the liquid crystal material of the pixel. In US 5 777 596, the charge time of liquid crystal display elements are compared to a reference value in order to determine which elements are being

30

touched. When using charge time or quantity as a measure of capacitance, the pixel needs to be completely discharged, and charged to a given voltage, in order to enable a comparison to be made. This inevitably disrupts the normal display operation. For example, in US 5 777 596, a so-called "blinking line" approach is used. A blinking line progresses from the top to the bottom of the screen, during which the display elements are driven between fully discharged and charged states. Clearly this provides an undesirable image artifact. An alternative approach disclosed in US 5 777 596 is a so-called "hot spot cursor" approach, in which a smaller area is caused to blink, and this blinking small area is dragged to the desired location. Again, the displayed image is disturbed.

According to the invention, there is provided a touch sensitive display device comprising an array of capacitive display element pixels, each display element being associated with a pixel circuit including a pixel storage capacitor, each display element being connected at a first terminal to the storage capacitor,

wherein the device further comprises one or more common electrode contacts, the or each common electrode contact being connected to a second terminal of a plurality of the display elements, and wherein each common electrode contact is individually connectable to a charge measurement means for measuring a flow of charge to the common electrode contact.

In this arrangement, the charge flowing through the capacitive display element to (or from) the second terminal can be measured. This flow of charge represents the transfer of charge between the pixel storage capacitor and the display element, resulting from a change in capacitance of the capacitive display element, and therefore indicative of a touch input. This charge measurement can be performed whilst the display pixel is displaying an image and without changing the normal display drive scheme.

There may be only one common electrode contact, which is the shared common electrode contact for all pixels of the array. In this case, touch sensing resolution is achieved by means of row conductors. However, a

plurality of common electrode contacts are preferably provided, so that resolution in row and column directions can be achieved. Each common electrode contact can then be connected to a respective charge sensitive amplifier (although a multiplexer could be used to enable an amplifier to be shared). The charge sensitive amplifier preferably connects the common electrode contact to a virtual earth potential, so that the common electrode contact is held to ground. Thus, the provision of charge measurement does not affect the normal display operation as the voltages used for the display operation are preserved.

Preferably, the array of display element pixels is arranged in rows and columns, and wherein each common electrode contact is connected to the second terminals of the display elements of a plurality of adjacent columns of display elements pixels. The contacts thus provide resolution across the columns. Each row of display element pixels then shares a common row conductor, and each pixel comprises a storage capacitor connected between the display element and the row conductor of an adjacent row of display element pixels. This enables the charge flowing to the storage capacitor to be monitored by means of the row conductors, so that the combination of charge measurement for the columns and for the rows allows the touch input location to be identified.

Preferably, a plurality of groups of adjacent rows are defined with each group individually connectable to a charge measurement means for measuring a flow of charge to the group of row conductors. This means that each touch input area is defined by the crossover of a group of rows and columns, so that the sensitivity is improved.

The capacitive display elements may comprise liquid crystal display elements.

The invention also provides a method of detecting a touch input in a touch sensitive display device, the device comprising an array of capacitive display element pixels each comprising a capacitive display element and a pixel storage capacitor, the method comprising:

applying display signals to the pixels of the array, by charging the display element of each pixel to a desired voltage through a pixel transistor;

isolating each pixel by switching off the pixel transistor, and storing the voltage on the display element using the pixel storage capacitor; and

5 whilst the pixel is isolated, sensing the charge flowing between the storage capacitor and the capacitive display element.

The sensing of the charge flowing enables a change in capacitance of the capacitive display element to be detected, which is indicative of the display being touched.

10 By sensing charge flowing after the pixels have been addressed, the method avoids distortion of the displayed image to enable touch sensing to be implemented.

The sensing is preferably carried out by monitoring the charge flowing to a terminal of the capacitive display element. Preferably this terminal of a
15 plurality of display elements is monitored, the plurality of display elements sharing a common contact and comprising a column or columns of display elements. Preferably, the charge flowing to a terminal of the pixel storage capacitor is also monitored. Preferably, the charge flowing to that terminal of a plurality of pixel storage capacitors is monitored, the plurality of pixel storage
20 capacitors sharing a common contact and comprising the pixel storage capacitors of a row or rows of pixels.

Thus, row conductors and the common contact shared between columns of the display elements are monitored in order to enable the location of touch input to be detected.

25 Changing display drive levels also results in capacitance changes, and therefore charge flow. Thus, a subset of the pixels of the array may be used for touch sensing and display, the remaining pixels being used only for display. In this case, substantially static images can be provided to the subset (for example alternate rows) of pixels.

30 Alternatively, the display data for the subset may be repeated, and touch sensing is performed in the first or in a subsequent repetition, so that the image is then static. The subset may be different for different frames, so that

the area used for touch sensing moves around the image. This enables the method to work reliably for moving images.

Examples of the invention will now be described in detail with reference
5 to the accompanying drawings, in which:

Figure 1 shows a known AMLCD pixel;

Figure 2 shows a known AMLCD display which may be modified in accordance with the invention;

Figure 3 is used to explain how an LC cell can be used for touch
10 sensing;

Figure 4 shows an equivalent circuit for an addressed pixel and is used to explain the touch sensing operation in more detail;

Figure 5 shows how display electrodes are arranged in accordance with the invention; and

15 Figure 6 shows a display in accordance with the invention.

This invention provides a display and a drive method which allows the sensing of physical pressure caused by finger or a stylus on the front of an LC display without adding extra components to the display substrate. This is
20 achieved by using components already present in the display to do the sensing and connecting them to additional electronic circuits. Furthermore, image distortion is avoided or kept to a minimum, and simultaneous display and sensing is obtained.

The basis of the system is to detect the change in capacitance of the LC
25 pixels in the display caused by pressure on the front glass (or plastic). Figure 3 shows a schematic cross-section of an active matrix liquid crystal display (AMLCD). The pixel capacitance is defined by the capacitance between the pixel electrode 40 and the common electrode 18 and is proportional to the reciprocal of the cell gap, 42. If pressure is applied, the substrates forming the
30 LC cell can deform as can the spacer balls 44, causing a reduction in the cell gap, 42, and hence an increase in the pixel capacitance.

The system of the invention senses the touch input during the period when the TFT 14 of the pixel circuit (Figure 1) is turned off, isolating the pixel and storage capacitors from the display columns 12. In this situation the equivalent circuit of the pixel is as shown in Figure 4. The node 23 is a node of the pixel circuit which is supplied with a pixel drive voltage by the transistor 14. This circuit will be referred to further below.

Figure 5 shows how the existing display components are used to provide the touch sensing function.

The common electrode 18 is divided into separate contacts 18a. Each electrode contact 18a is connected to the second terminal of the display elements of a number of columns of pixels. Each common electrode contact 18a is individually connectable to a charge sensitive amplifier for measuring a flow of charge to the common electrode contact 18a. In this way, the charge flowing through the LC cell 16 to the second terminal (which is no longer common to all pixels) can be measured. This flow of charge represents the transfer of charge between the storage capacitor 20 and the LC cell 16, and is indicative of a touch input.

The rows are also arranged in groups 10a, so that touch sensitive input areas 46 are defined by the crossover of a group 10a of rows and a group of columns sharing the common electrode contact 18a.

If it is assumed that the common electrode is split into S segments and the row conductors to which the storage capacitors are attached are divided into R groups 10a, this allows touch to be sensed in R x S areas of the display. Increasing R and/or S increases the resolution of the sensing but means that the size of the charge sensed will be smaller. R and S can therefore be selected according to the demands of the application.

As there is a voltage V_{LC} typically in the range 2V - 6V across the LC cell, an increase in the capacitance will cause a flow of charge into the pixel from the common electrode 18, and from the connection to the storage capacitor 20. This connection is an adjacent row in the pixel circuit of Figure 1, although it may be a separate capacitor line.

In the simple arrangement illustrated in Figure 4, if the capacitance C_{LC} of the LC cell 16 is changed by an amount ΔC then, provided ΔC is small compared to C_{LC} and the storage capacitance C_S (of capacitor 20), the amount of charge flow, ΔQ , required to hold the voltage across C_S and C_{LC} in series is given by:

$$\Delta Q = \frac{\Delta C \cdot V_{LC} \cdot C_S}{C_{LC} + C_S}$$

The approximate magnitude of the charge displaced by touching the display is easy to determine from this formula. For a typical AMLCD, C_S is approximately equal to C_{LC} . The value of ΔC , assuming standard cell thickness and dielectric constant for the LC material and a 5% change in cell gap, is 44pf/cm². If $V_{LC} = 4V$ then $\Delta Q = 88pC/cm^2$. If around 0.5 cm² of the area of the display is distorted then the charge displaced will be around 45pC which can easily be detected by standard charge amplifiers connected as described below.

Figure 6 shows a schematic diagram for a method of sensing the charge displacement produced by the distortion of the LC cell gap. Each group 10a of rows and each common electrode contact 18a is connected to a virtual earth charge sensitive amplifier 50. A row group 10a and a common electrode contact 18a are each illustrated as a single line in Figure 6 for simplicity. When an area of the display is touched, the charge will flow in one or more of the common electrode contacts 18a and in one or more of the row groups 10a. These charge flows will be sensed by the charge sensitive amplifiers 50 connected to those row groups and common electrode contacts and will produce a change in the signal on the output of the amplifiers. By continuously monitoring the outputs of the S common electrode contacts and R row groups, the signal resulting from touching the display may be sensed and the position and area being touched can be deduced by determining which amplifiers have produced the signal. The charge sensitive amplifiers are virtual earth amplifiers, so that the effects of cross coupling capacitances

between the common electrode contacts or the row groups in other parts of the display are minimised.

The amplifiers also hold the row and column conductors to ground potential during the touch sensing operation, which is compatible with the
5 normal display operation of the device.

A simple version of this system can be made with a single common electrode contact ($S = 1$). This cannot detect horizontal position but can detect vertical position which, for many actions like selecting from a standard menu in which the items are all at different vertical positions, gives all the information
10 needed by the application.

In a standard LC display, changes in pixel capacitance can be induced by changes in drive level on the pixels, since the LC dielectric constant and hence cell capacitance is drive-level dependant. This means that changing images can induce similar signals to those produced by a touch input and
15 could cause spurious touch detection signals to be generated.

For a static image there is no issue, and the sensing is straightforward. Since, in the applications for which touch input is required, the images (for example of menus, key pads etc.) are usually static, then the effect of changing images is not an issue. There is also no problem if only a small
20 fraction of the pixels in the area of the row blocks or common electrode segments change such that the capacitance changes induced by the image changes are small compared to those induced by touch pressure. Furthermore it is possible to allow larger changes in image if some cause capacitance change in one direction and some in the other, resulting in
25 cancellation and zero or very small change in overall capacitance. For example, an image with blocks flashing black to white and others of equal area under the same segments flashing white to black (i.e. in antiphase) will not cause a problem as the total capacitance will be constant.

It is, however, possible to adapt the use of the display to allow for
30 moving images to be displayed whilst still enabling touch sensing.

The touch sensing is still carried out whilst the pixel is isolated, again sensing the charge flowing between the storage capacitor and the capacitive

display element. However, a subset of the pixels of the array may be used for touch sensing and display, the remaining pixels being used only for display. In this way, substantially static images can be provided to the subset of pixels. For example, only every other (or every n^{th}) connection in the horizontal group of rows is used for sensing and the moving parts of the image are only directed onto the rows which are not connected to the sense amplifiers. As a result, there is no capacitance change in the sensing rows. This is more difficult to apply in the vertical direction and may only be applicable to images where only selection of a vertical position is needed (as described above for the example where $S=1$).

Alternatively, the display data for the subset may be repeated, and touch sensing is performed during the period when the image data is repeated, so that the image is then static. Thus, the information on one (or more) of the sensing blocks can be intentionally repeated for 2 or more frames to allow sensing of those blocks only. By shifting the position of the active sensing blocks through the display from frame to frame, the entire display could be scanned for touch input. The perceptive impact of this would be minimal.

In the example above, a terminal of each storage capacitor is connected to the following row. Instead, additional capacitor contact row conductors may be provided, and these will then be coupled to the charge sensitive amplifiers.

In this description, where the terms "row" and "column" are used, this is purely arbitrary, and the display may be rotated by 90 degrees. Thus, these terms are not to be construed as limiting, and more significant is that conductors cross (not necessarily at 90 degrees) in order to define unique touch sensing areas.

The preferred implementation is for an LC display, but other capacitive display elements, which display a change in capacitance in response to applied pressure, could also be contemplated.

As explained above, the invention enables a normal drive scheme to be used for the display, although modifications are possible to ensure that the touch sensing is performed only in areas of the display where there is no image change. The invention simply requires the addition of charge sensitive

amplifiers, either in the row and column drivers (30,32 of Figure 2) or in additional dedicated circuitry. The invention also requires patterning of the common electrode layer – if more than one common electrode contact is desired.

5 Various other modifications will be apparent to those skilled in the art.

CLAIMS

1. A touch sensitive display device comprising an array of capacitive display element pixels, each display element being associated with a pixel circuit including a pixel storage capacitor, each display element being
5 connected at a first terminal to the storage capacitor,
wherein the device further comprises one or more common electrode contacts, the or each common electrode contact being connected to a second terminal of a plurality of the display elements, and wherein each common
10 electrode contact is individually connectable to a charge measurement means for measuring a flow of charge to the common electrode contact.
2. A device as claimed in claim 1, wherein a plurality of common electrode contacts are provided.
- 15 3. A device as claimed in claim 2, wherein each common electrode contact is connected to a respective charge measurement means.
4. A device as claimed in any preceding claim, wherein the or each charge
20 measurement means comprises a charge sensitive amplifier.
5. A device as claimed in claim 4, wherein each charge sensitive amplifier connects the common electrode contact to a virtual earth potential.
- 25 6. A device as claimed in any preceding claim, wherein the array of display element pixels is arranged in rows and columns, and wherein each common electrode contact is connected to the second terminals of the display elements of a plurality of adjacent columns of display element pixels.
- 30 7. A device as claimed in claim 6, wherein each row of display element pixels shares a common row conductor for providing a pixel address signal, and wherein the storage capacitor of each pixel is connected between the

display element and the row conductor of an adjacent row of display element pixels.

5 8. A device as claimed in claim 6, wherein each row of display element pixels shares a common capacitor row conductor, and the storage capacitor of each pixel is connected between the display element and the capacitor row conductor.

10 9. A device as claimed in claim 7 or 8, wherein a plurality of groups of adjacent rows are defined with each group individually connectable to a charge measurement means for measuring a flow of charge to the group of row conductors.

15 10. A device as claimed in any preceding claim, wherein each pixel circuit comprises a transistor which is addressed by a signal on a row conductor associated with a row of display element pixels, and which provides a signal from a column conductor associated with a column of display element pixels to the display element.

20 11. A device as claimed in any preceding claim, wherein the capacitive display elements comprise liquid crystal display elements.

25 12. A method of detecting a touch input in a touch sensitive display device, the device comprising an array of capacitive display element pixels each comprising a capacitive display element and a pixel storage capacitor, the method comprising:

applying display signals to the pixels of the array, by charging the display element of each pixel to a desired voltage through a pixel transistor;

30 isolating each pixel by switching off the pixel transistor, and storing the voltage on the display element using the pixel storage capacitor; and

whilst the pixel is isolated, sensing the charge flowing between the storage capacitor and the capacitive display element.

13. A method as claimed in claim 12, wherein the sensing is carried out by monitoring the charge flowing to a terminal of the capacitive display element.

5 14. A method as claimed in claim 13, wherein the charge flowing to a terminal of a plurality of display elements is monitored, the plurality of display elements sharing a common contact and comprising a column or columns of display elements.

10 15. A method as claimed in claim 14, wherein the sensing is carried out by also monitoring the charge flowing to a terminal of the pixel storage capacitor.

15 16. A method as claimed in claim 15, wherein the charge flowing to a terminal of a plurality of pixel storage capacitors is monitored, the plurality of pixel storage capacitors sharing a common contact and comprising the pixel storage capacitors of a row or rows of pixels.

20 17. A method as claimed in any one of claims 12 to 16, wherein a subset of the pixels of the array are used for touch sensing and display, the remaining pixels being used only for display.

18. A method as claimed in claim 17, wherein substantially static images are provided to the subset of pixels.

25 19. A method as claimed in claim 17 or 18, wherein the subset comprises a plurality of rows of pixels.

30 20. A method as claimed in claim 17, wherein the display data for the subset is repeated, and touch sensing is performed in the first or in a subsequent repetition.

21. A method as claimed in claim 20, wherein the subset is different for different frames.

ABSTRACT

AMLCD WITH INTEGRATED TOUCH INPUT

A touch sensitive display device has an array of capacitive display element
5 pixels, each associated with a pixel storage capacitor. One or more common
electrode contacts are provided and connected to a terminal of a plurality of
the display elements. Each common electrode contact is individually
connectable to a charge measurement device for measuring a flow of charge
to the common electrode contact. The charge flowing through the capacitive
10 display element can thus be measured. This flow of charge represents the
transfer of charge between the pixel storage capacitor and the display element
and results from a change in capacitance, and therefore indicative of a touch
input.

15 [Fig. 6]

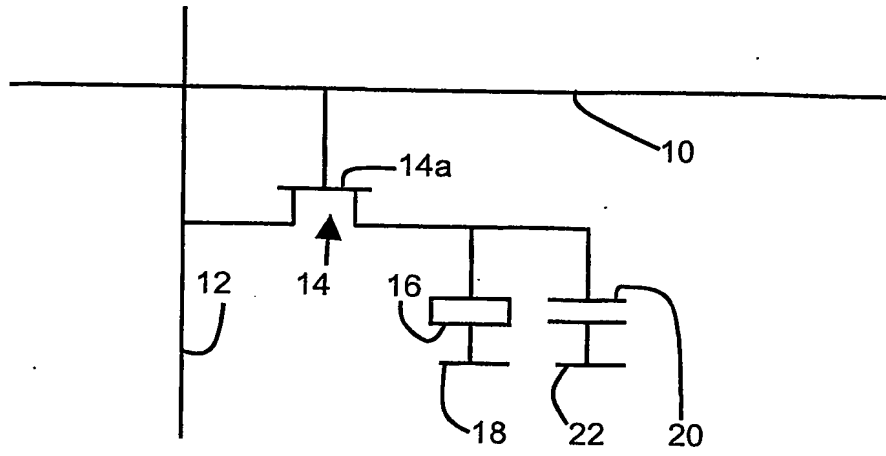


FIG. 1

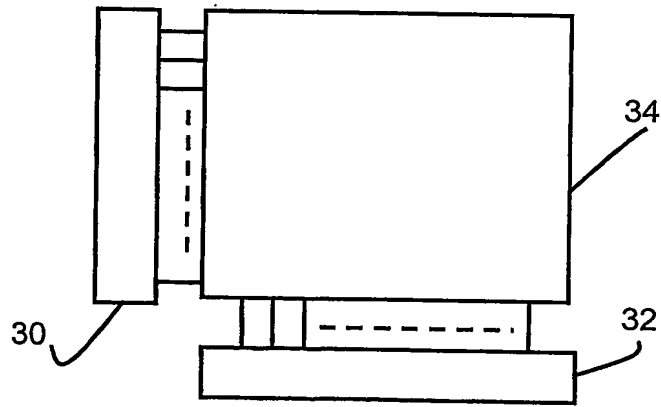


FIG. 2

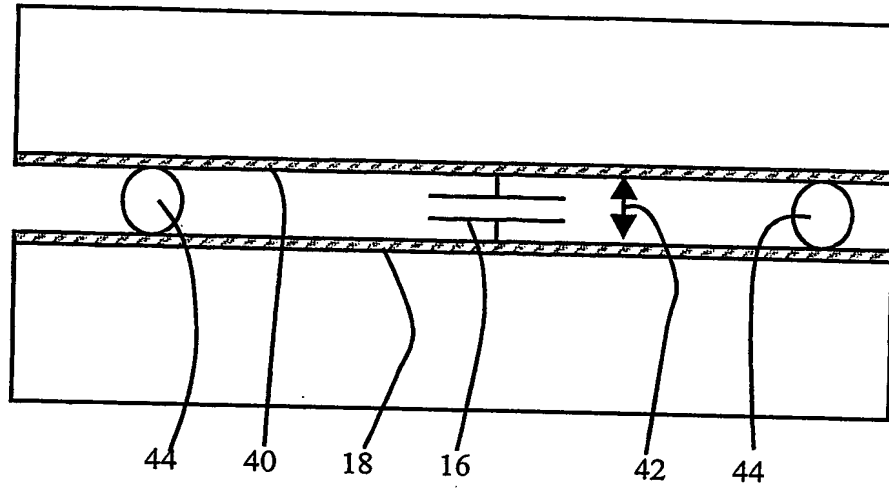


FIG. 3

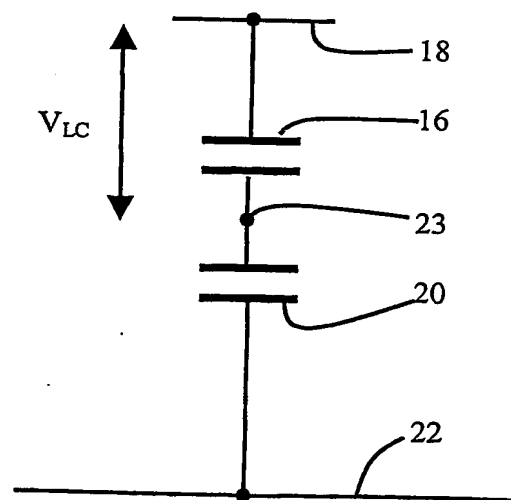


FIG. 4

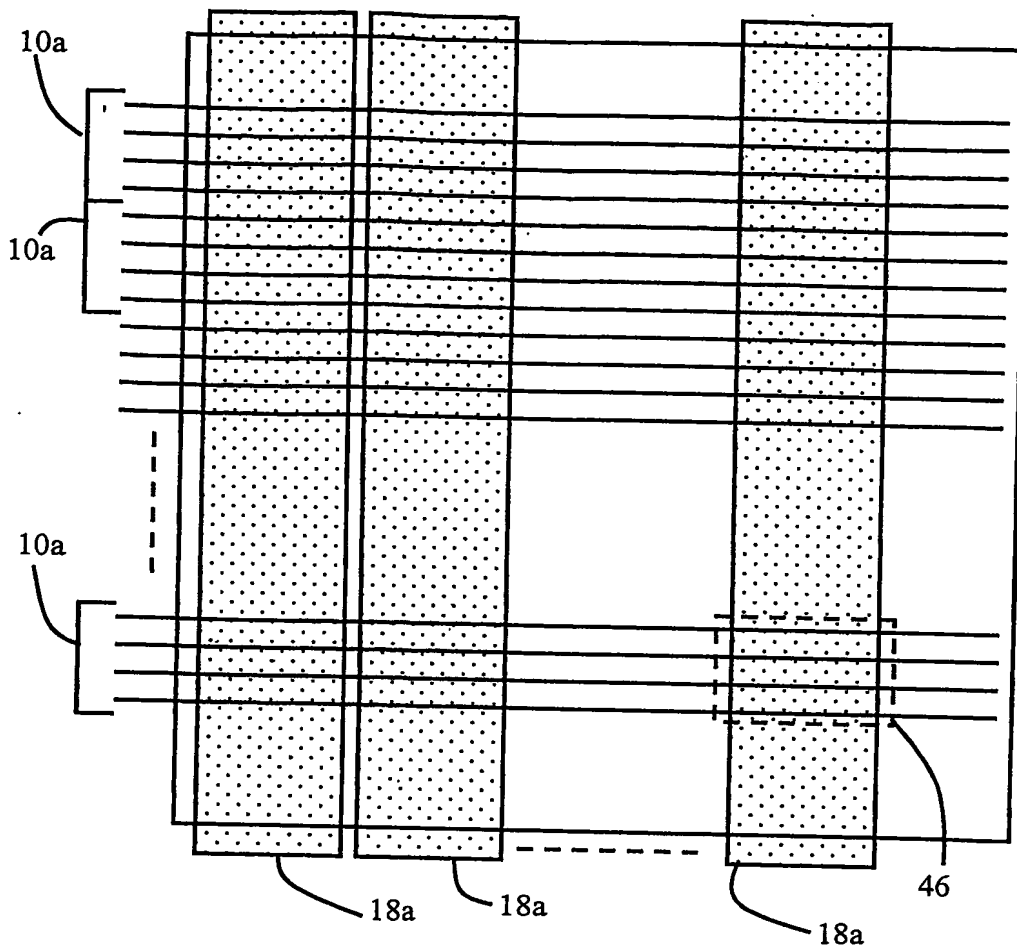


FIG. 5

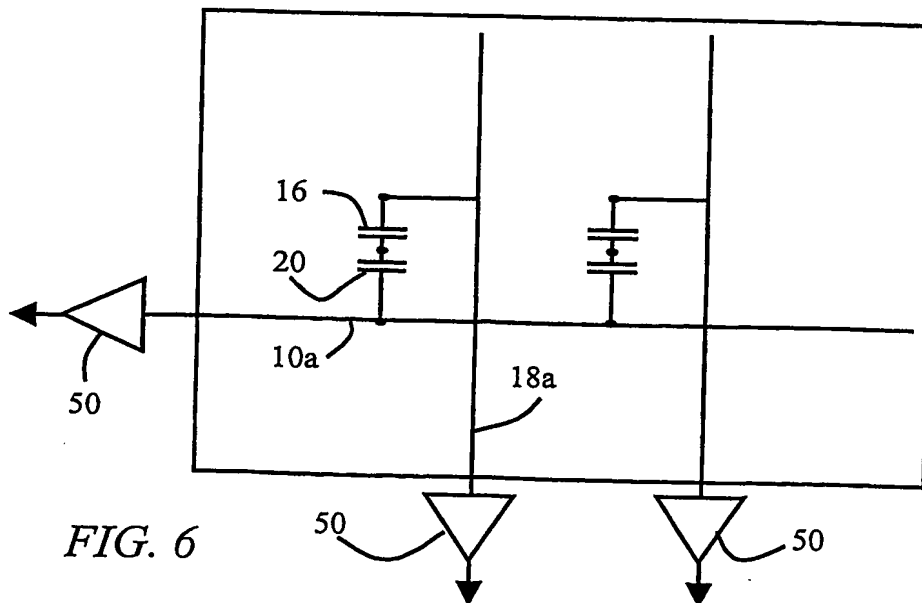


FIG. 6

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.